




DC PRO - 2 GROUPS

STYLE Enjoyment starts with design. The form allows all users to work intuitively. The function ensures the highest level of quality. Versions: Alu Black, Alu White, Dynamic White, Industrial Titanium, Total White, Total Black.

EFFICIENCY Attractive design like never before, 54 mm-diameter portafilter for an optimum extraction, ergonomic handgrips, easy and quick milk frothing. Semi-automatic cleaning program for brewing group and steam boiler

CONSISTENCY, CUP BY CUP Separated steam boiler and brewing group with our patented multi boiler technology. Set temperature with 0,1 degree temperature precision, find the sweet spot of your coffee. Available with the dc system (GCS, MCS, OCS).

SUSTAINABILITY Independent group give the possibility to turn off unused brewing groups or the boiler. Lead Free: all parts exposed to water are in lead-free alloy certified by NSF. Construction materials are totally recyclable.

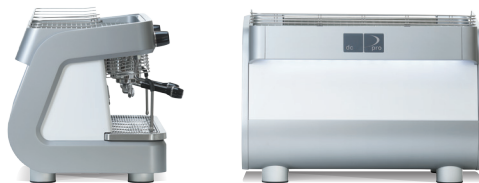

dimensions (w x h x d)	730 x 525 x 510 mm
weight	74 kg
power consumption (24h-stand-by)	7,9 kW
max power	4,3 kW
connected load	200/230 V 3, 400 V 3 N
boiler capacity	7,5 l
capacity of group heads	0,5 l
serial connection	RS 232/485
low power system (LPS)	included
timer	included
front and back illumination	included

**DALLA
CORTE**
*Make it
Better*



CLASSIC ALUMINIUM/WHITE

2 groups 1-MC-DC-PRO-2-B-400



DYNAMIC WHITE

2 groups 1-MC-DC-PRO-2-W-400



CLASSIC ALUMINIUM/BLACK

2 groups 1-MC-DC-PRO-2-N-400



TOTAL WHITE

2 groups 1-MC-DC-PRO-2-X-400



INDUSTRIAL TITANIUM

2 groups 1-MC-DC-PRO-2-T-400



TOTAL BLACK

2 groups 1-MC-DC-PRO-2-Y-400

GCS Grinder Control System - connection with dc one or dc two grinder
MCS Milk Control System - requires a specific steam wand
OCS Online Control System - remote control with LAN module and connection cable
Multigrinder kit - possible connection of 2 or 3 dc one grinders